






**KOLOVRAT, ČM s. r. o.**  
stylové dekorační látky  
391 55 Chýnov

**Základní technické údaje:**

<b>Druh:</b>	<b><u>NANTA</u></b>		
<b>Určení:</b>	<b>potahová tkanina</b>		<b>ČSN EN ISO</b>
<b>Materiálové složení:</b>		100 % CO	
<b>Šíře:</b>		140 cm	
<b>Hmotnost:</b>		530 g/m	
<b>Dostava osnovy / útku:</b>	osnova:	75 nití / cm	
	útek:	27 nití / cm	
<b>Pevnost v tahu:</b>	osnova:	1307 N	13934-1
	útek:	782 N	13934-1
<b>Pevnost v dotržení:</b>	osnova – přetrh útků:	114 N	13937-3
	útek-přetrh osnovy:	69 N	13937-3
<b>Odolnost v oděru:</b>	Martindale průměr:	5 125 otáček	12947-2
<b>Odolnost proti žmolkování:</b>	stupeň:	3 – 4	12945-2
<b>Posuv nití ve švu:</b>	posuv osnovních nití:	3,0 mm	13936-2
	posuv útkových nití:	3,0 mm	13936-2
<b>Stálobarevnost:</b>	na světle:	5-6	105-B02
	v suchém otěru:	4-5/4-5	105-X12
	v mokřém otěru:	4-5/4-5	105-X12
	v praní:	4/5/5	105-C06
	v chemickém čištění:	4-5/5	105-D01
<b>Změna rozměrů po praní:</b>	osnova:	-6,7 %	25077
	útek:	-4,3 %	25077
<b>Způsob ošetřování:</b>		šamponování 	
<b>Kategorie:</b>	C – běžné použití v domácnosti		14 465
<b>Úprava:</b>	rozměrové ustálení pryskyřicí		
<b>Možné provedení:</b>	nehořlavé (jen u větších množstvích)		
<b>Vzory a jejich opakování:</b>			

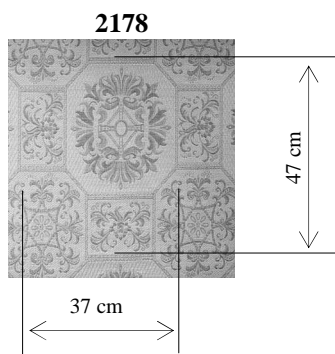

Všechny vzory jsou chráněny autorskými právy.



TLF 381 297 011  
FAX 381 297 029  
E-Mail: [info@kolovrat.cz](mailto:info@kolovrat.cz)  
http:// [www.kolovrat.cz](http://www.kolovrat.cz)

IČO: 47252561  
DIČ: CZ47252561  
OR: Krajský soud České Budějovice, C 2213



**KOLOVRAT, ČM s. r. o.**  
*Glamorous Jacquard Fabrics*  
**CZ-391 55 Chýnov**

---

<b>Article:</b>	<b><u>NANTA</u></b>	
<b>Applications:</b>	<b>upholstery fabric</b>	
<b>Composition:</b>		100 % CO
<b>Width:</b>		140 cm
<b>Mass:</b>		530 g/m
<b>Yarn density:</b>	warp:	75 threads/cm
	weft:	27 threads/cm
<b>Tensile strength:</b>	warp:	1307 N
	weft:	782 N
<b>Tear strength:</b>	warp:	114 N
	weft:	69 N
<b>Abrasion thread breakage:</b>	Martindale:	5 125 cycles
<b>Tear fastness:</b>	degree:	3-4
<b>Seam slippage:</b>	warp direction:	3,0 mm
	weft direction:	3,0 mm
<b>Colour fastness:</b>	to light:	5-6
	to dry rubbing:	4-5/4-5
	to wet rubbing:	4-5/4-5
	to washing:	4/5/5
	to chemical cleaning:	4-5/5
<b>Shrinkage after washing:</b>	warp:	-6,7 %
	weft:	-4,3 %
<b>Maintenance:</b>		shampooing 
<b>Finishing:</b>	size fixation	
<b>Modifications:</b>	flame retardant (larger quantities only)	
<b>Designs and repeats:</b>	<b>2178</b>	→ 37 cm   ↓ 47 cm

All designs are protected by copyright.

TLF: +420 381 297 011  
FAX: +420 381 297 029  
E-Mail: [info@kolovrat.cz](mailto:info@kolovrat.cz)  
http:// [www.kolovrat.cz](http://www.kolovrat.cz)

Identification No.: 47252561  
VAT No.: CZ47252561  
Registration No.: České Budějovice, C 2213